

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/028953 A1

(51) International Patent Classification⁷: **F21V 21/096**,
F16B 45/00, E04H 15/32

(21) International Application Number:
PCT/AU2004/001247

(22) International Filing Date:
14 September 2004 (14.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003905229 24 September 2003 (24.09.2003) AU

(71) Applicant and

(72) Inventor: **WOLFINGER, David, Gary** [AU/AU]; Unit 4,
154 Hastings Parade, NORTH BONDI, New South Wales
2026 (AU).

(74) Agent: **GRIFFITH HACK**; GPO Box 4164, SYDNEY,
New South Wales 2001 (AU).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A MOUNTING DEVICE FOR USE WITH A THIN WALLED STRUCTURE

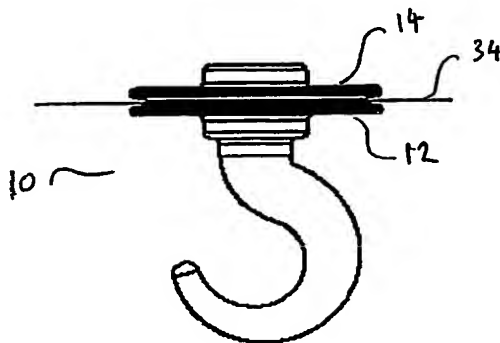

(57) Abstract: A mounting device (10) for mounting accessories to a wall (34) of a thin walled structure such as a tent or a sheet of glass. Device (10) includes first member (12) having first engagement surface (18); a mounting portion suitable for mounting an accessory such as a light fitting; and second member (14) having second engagement surface (22); the first and second members (12, 14) being magnetically attracted to one another so that when applied on opposite sides of wall (34), first and second surfaces (18, 22) frictionally engage the part of wall (34) between them and retain mounting device (10) on wall (34). First and second surfaces (18, 22) have surrounding edges which are profiled to allow device (10) to slide smoothly on wall (34) when device (10) is forcibly moved in relation to wall (34).

WO 2005/028953 A1